



PN 10/16 - DN 40...300

KAT-A 1010-F5-EW

Product characteristics and benefits

- Resilient seated in accordance with EN 1074 (DIN 3352 - 4B)
- Face-to-face length acc. to EN 558-1, basic series 15 (DIN 3202, F5)
- With flange ends on both sides acc. to EN 1092-2
- Boltless bonnet with pressure supported sealing system
- Low operating torque due to plastic sliding guides on the wedge
- Maintenance-free and corrosion-resistant stem sealing
- With O-ring sealing
- Low wear due to wedge guiding and elongated stem bearing
- Suitable for vacuum of up to 90%

Materials

- Body: Ductile iron EN-GJS-400-15 (GGG-40)
- Bonnet: Ductile iron EN-GJS-400-15 (GGG-40)
- Wedge: Ductile iron EN-GJS-400-15 (GGG-40) encapsulated with EPDM vulcanized
- Stem: Stainless steel 1.4021
- Stem nut: Brass

Corrosion protection

- Internally and externally epoxy coated acc. to GSK guidelines

Versions

- Standard version as described
- With handwheel

Field of application

- Underground installation
- Chamber installation

**Tests and approvals**

- Final inspection test acc. to EN 12266
- DVGW tested and registered
- Elastomers approved acc. to W270

Accessories

- T-key
- Installation equipment
- Extension spindle
- Surface box cast iron
- Plastic base plate
- VAG SERIO®*plus* position indicator

Note

For proper installation and safe operation please follow the installation and operation instructions:

“Installation and Operating Instructions for Valves”

Operating conditions

DN	PN	Maximum operating pressure [bar]	Maximum operating temperature for medium [°C]
40...300	16	16	50
200...300	10	10	50

Pressure test acc. to EN 12266


Test pressure body with water [bar]	Test pressure seat with water [bar]
24	17.6
15	11

VAG BETA® 200 Gate Valve

resilient-seated - long face-to-face length - epoxy

Water

Drawing

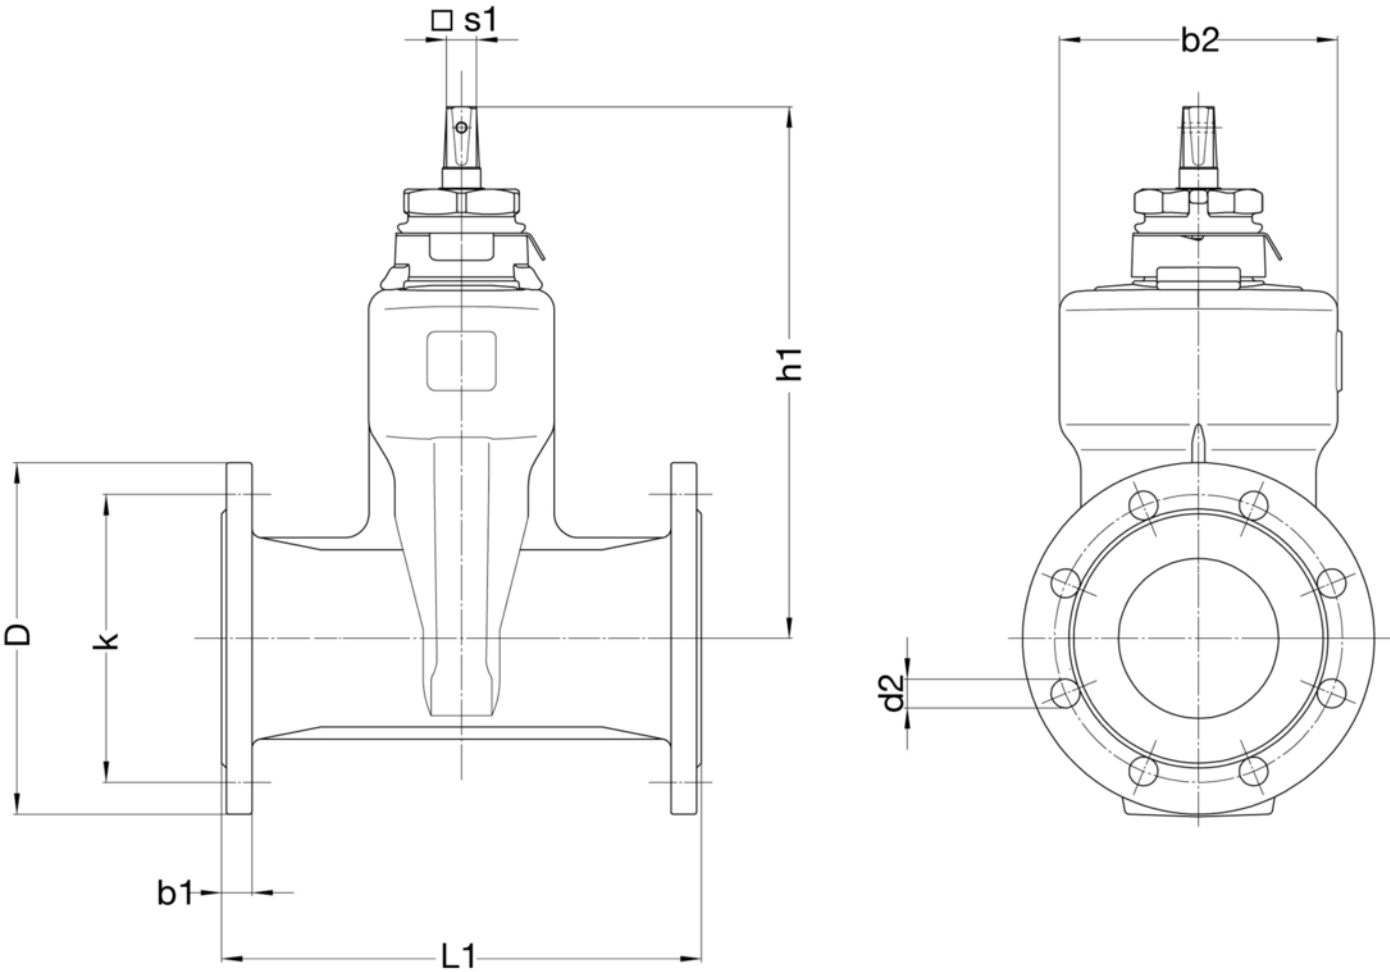

Technical data

PN 10

DN		200	250	300
D	[mm]	340	400	455
k	[mm]	295	355	410
L1	[mm]	400	450	500
b1	[mm]	20	22	24,5
b2	[mm]	320	396	471
d2	[mm]	23	28	28
h1	[mm]	523	633	713
∅ s1	[mm]	24	27	27
No. of holes		8	12	12
Turns/stroke		34	43	51
Weight approx.	[kg]	76.00	126.00	174.50
Volume ap-prox.	[m³]	0.11	0.185	0.26



Technical data

PN 16

DN		40	50	65	80	100	125	150	200	250	300
D	[mm]	150	165	185	200	220	250	285	340	400	455
k	[mm]	110	125	145	160	180	210	240	295	355	410
L1	[mm]	240	250	270	280	300	325	350	400	450	500
b1	[mm]	19	19	19	19	19	19	19	20	22	24,5
b2	[mm]	125	125	160	160	174	220	246	320	396	471
d2	[mm]	19	19	19	19	19	19	23	23	28	28
h1	[mm]	245	245	280	280	334	379	417	523	633	713
Ø s1	[mm]	14	14	17	17	19	19	19	24	27	27
No. of holes		4	4	4	8	8	8	8	12	12	12
Turns/stroke		11	13,5	16	20	20	25	30	34	43	51
Weight approx.	[kg]	10,50	11,50	16,50	18,00	24,50	32,50	44,00	76,00	126,00	174,50
Volume approx.	[m³]	0,015	0,015	0,02	0,025	0,035	0,05	0,07	0,11	0,185	0,26